



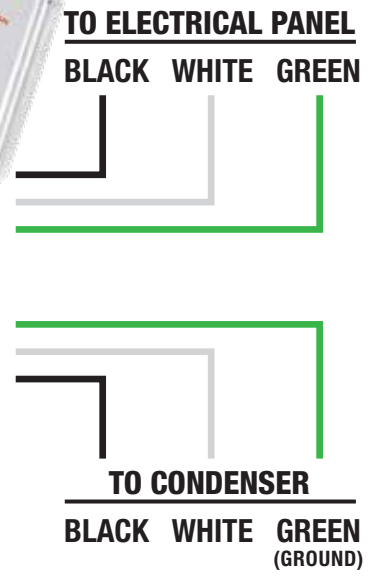

**Wiring Instructions for the following
Disconnect/Standby Switches:
DSS15 • DSS15S • DSS25 • DSS25S • DSS30 • DSS30S**

240 VOLT

120 VOLT

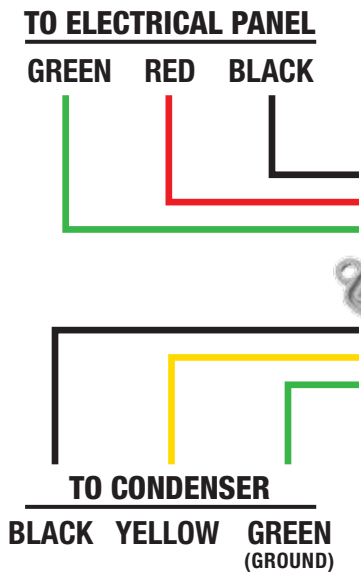

**WARNING
SHUT OFF POWER BEFORE INSTALLATION**

GREEN LED (PWR) illuminates when utility power is available, engage switch up.
OFF-DISCONNECT position
RED LED (GEN) illuminates when generator power is available, engage switch down.

NOTE! BREAKER IN PANEL MUST EQUAL MAXIMUM CIRCUIT AMPACITY OF THE AC UNIT

Voltage.....	240V	Voltage.....	120V
Wire Size.....	10-GAUGE UL RATED	Wire Size.....	14-GAUGE UL RATED
Plug.....	NEMA/UL	Plug.....	NEMA/UL
Switch.....	DPDT 15-30 AMP 3 positions UL RATED	Switch.....	DPDT 15 AMP 3 positions UL RATED
LED indicator lights 22MM.....	UL RATED	LED indicator lights 22MM.....	UL RATED
Enclosure.....	NEMA UL RATED	Enclosure.....	NEMA UL RATED
IP Rating.....	82 (suitable for wet locations)	IP Rating.....	82 (suitable for wet locations)
Country of Origin.....	Assembled in the U.S.A.	Country of Origin.....	Assembled in the U.S.A.
Switch Modes.....	Power, Off, Generator	Switch Modes.....	Power, Off, Generator