



**WATER DAMAGE IS THE 2nd MOST FREQUENTLY
FILED INSURANCE CLAIM IN THE U.S.**

**WATER DAMAGE IS OFTEN
CAUSED BY IMPROPERLY
PITCHED DRAIN LINES.**

Problem:



Improper pitch as a result of using scrap materials during installation can lead to liquid and bacterial build-up, causing cracks in drain pipe over time.

Solution:



Perfect Pitch® is an adjustable fastening system that simplifies condensate and waste piping installations by providing an easy-to-use calibrated fixture for clean, professional-looking, and code-compliant installations. This award-winning product saves time and labor and ensures Perfect Pitch® for peace of mind.

ARPP-1001-MA1



**5
PACK
KITS**

**NOW
AVAILABLE**



Perfect Pitch® Condensate/Waste Kit

DISTRIBUTED BY



402 Merrywood Drive Edison NJ 08817

☎ 732-985-8226

✉ info@marketair.com

DEVELOPED BY




Perfect Pitch® is trademarked and developed by Midsun Specialty Products, Inc.

GLOBAL LEADER IN SILICONE AND
SPECIALTY PRODUCTS
MIDSUNSP.COM

SAVE TIME INSTALLING CONDENSATE DRAINS

ENSURES AN ACCURATE
CODE-COMPLIANT PITCH ON
CONDENSATE AND WASTE DRAIN
PIPE INSTALLATIONS

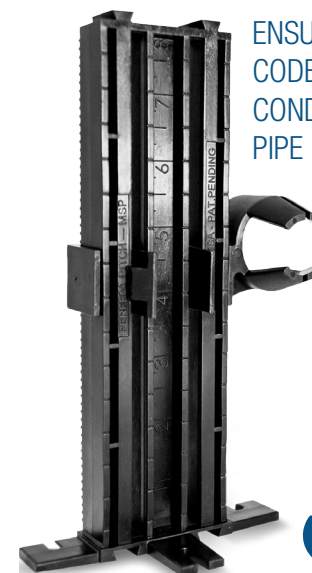

For use with:

- Air Handlers
- Gas Furnaces
- Gas Boilers
- Hot Water Heaters
- Condensate / Waste Applications



DESIGNED BY
**EXPERIENCED HVAC
PROFESSIONALS**



**PROUDLY
MADE IN USA**

Features:




Pipe Versatility

Fits almost any diameter run. Attach any style 1/2", 3/4", 1", 2" and 3" pipe.



Stackable Design

Stack stanchions for longer runs and more complex installations.



Angled Slot Base

Screw slots on base are angled to accommodate clearance for drill chuck.



Multiple Lines

Run parallel or multiple pipes on one stanchion. Increase space efficiency on intricate installations.



Built-in Ruler

Set pitch to desired intervals using built-in ruler. Measure vertically up to 16".



Lock Into Place

Using solid glass filled material, molded teeth prevent clamps and other attachments from slipping or sagging.

How the System Works:

Simply Pitch to Code

Position **Stanchions** from source to termination at intervals required in accordance with local, state, and federal building codes and refer to source unit (i.e. air handler) manufacturer's requirements.



STANCHION



1" Pipe And Under

Use the **Universal Pipe Clamp** attachment for the following diameters:

1/2", 3/4", and 1"

Determine pitch necessary and snap **Universal Pipe Clamp** into stanchion.



UNIVERSAL PIPE CLAMP



Job Site Installs:



2" Pipe And Over

Large diameter pipes require the **Clamp Adaptor**, providing stability for heavier installations such as gas furnace condensate.



CLAMP ADAPTOR



NEW!



NEW!

2" Clamp

2" **Clamp** snaps into dovetails on **Clamp Adaptor**.

3" Clamp

3" **Clamp** snaps into dovetails on **Clamp Adaptor**.

Quick Specs:

Test	Result	Method
Weight Limit	35 lb Max	N / A
Tensile Strength	6,500 psi	ASTM D 638
Gardner Impact	6 in-lbs	ASTM D 5420
Deflection Temperature @ 66psi	300° F	ASTM D 648

Don't use Perfect Pitch® on your installs?

Ask your local supply house when you can start OR give us a call.

Don't stock Perfect Pitch® in your warehouse?

Call or Email Us:
Toll Free: 732-985-8226
info@marketair.com